


Coil Winder TD4T Flywinder

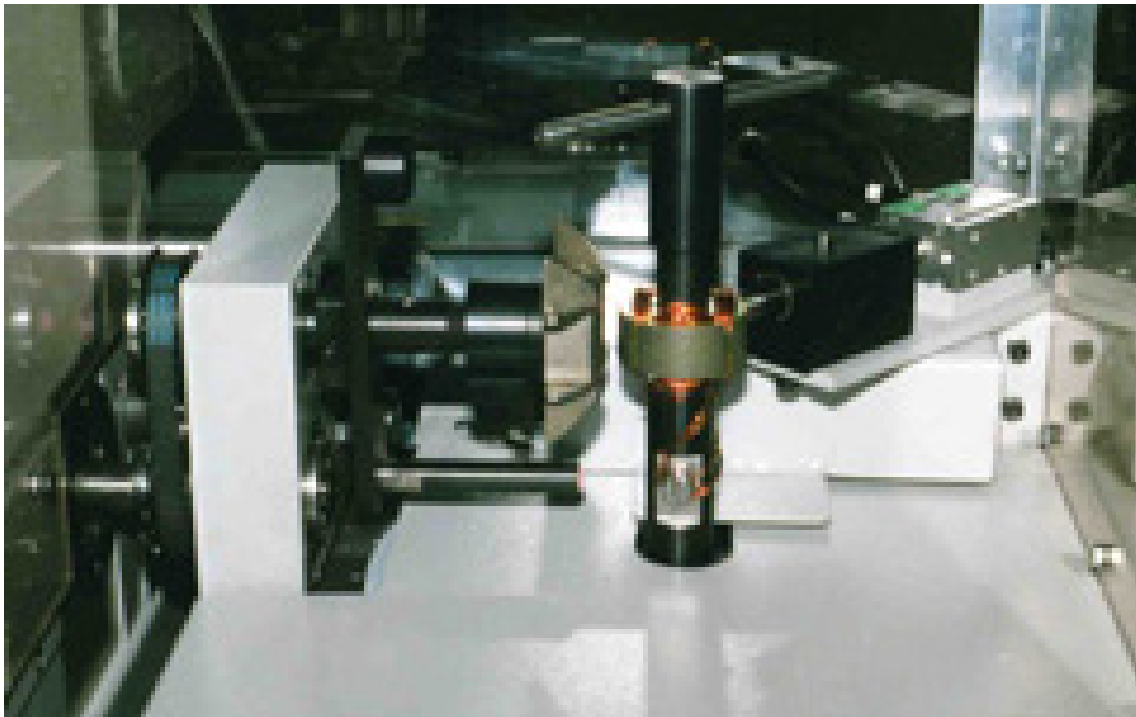

TECHNICAL SPECIFICATIONS

Wire Pitching: Up to 1mm
Winding Length: Up to 20mm
Rotor Diameter: 25-80mm
Rotor Width: Up to 40mm
Spindle Speed: Variable up to 2,000 rpm
Supply: 240V 50 Cycles 10 Amp
Motor: 0.75 kW

CONTROL SYSTEM

Start Sequence: Push button
Table Index: Manual/pneumatic
Table in/out: Manual/pneumatic
Rotor Clamping: Pneumatic
Rotor Positioning: Spring-loaded plunger/
 pneumatic

CNC 210s- incorporating 1,000 winding programmes, each programme dictating number of turns, acceleration, deceleration, winding speed, pitch, direction of rotation and flyer stopping position

Tension Control: Azonic 4C3000 (for wires 0.3-1.5mm)



Unit 5, Bawdon Lodge Farm, Charley Rd. Nanpantan, Leicestershire, LE12 9YE
 Phone: +44 (0) 1509 239 832 • Fax: +44 (0) 1509 239 837
 e-mail: sales@td-engineering.com
 web: td-engineering.com

OR CONTACT:

WYREPAK INDUSTRIES
 wyrepakdave@yahoo.com
 USA phone: 860-632-5477